


SHORT RADIUS  
DESIGNED TO BE INSTALLED  
IMMEDIATELY UP-STREAM OF A  
SHORT RADIUS 90° ELBOW.

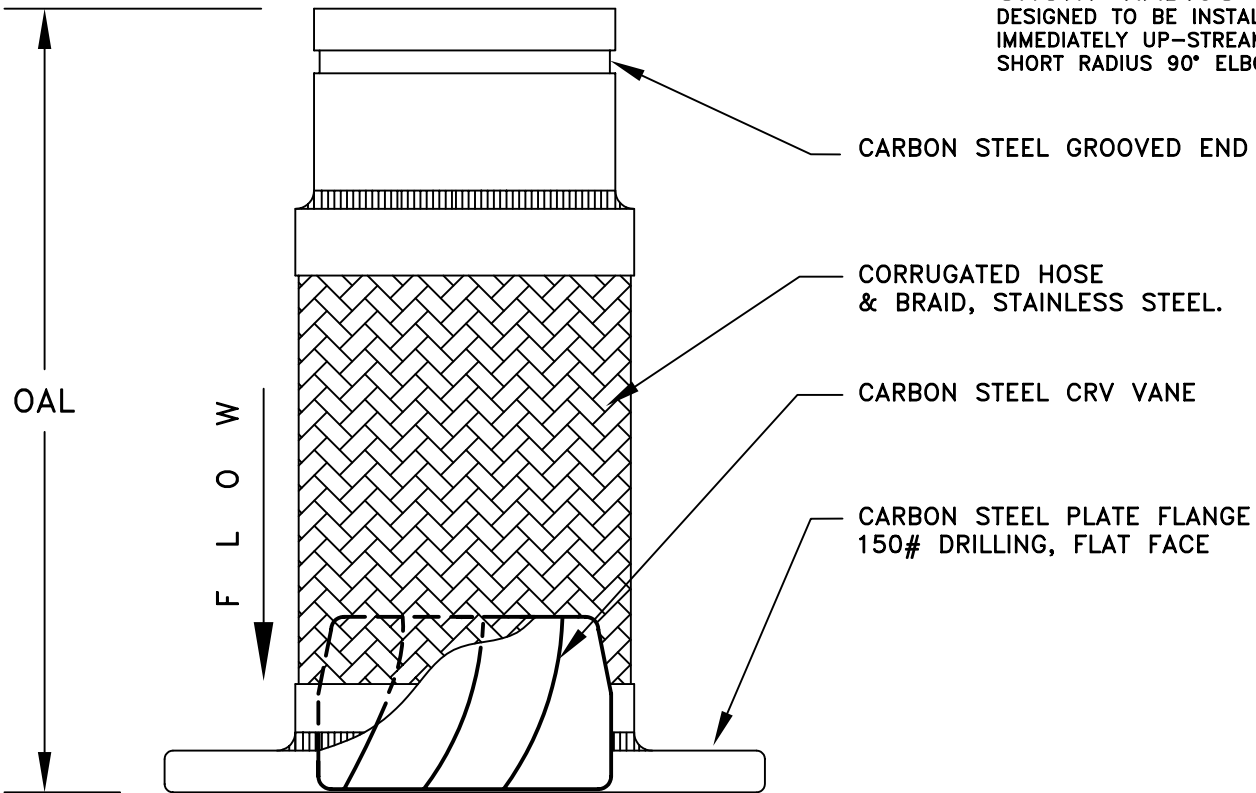

ALL DIMENSIONS ARE INCHES

QTY	MODEL #	SIZE	OAL	PRESS. @ 70° F *	NOTES
	CRVSGF0200	2	11.75	455	
	CRVSGF0250	2.5	11.75	345	
	CRVSGF0300	3	11.75	289	
	CRVSGF0400	4	11.75	300	
	CRVSGF0500	5	13.5	220	
	CRVSGF0600	6	13.5	200	
	CRVSGF0800	8	15.25	190	
	CRVSGF1000	10	16.25	150	
	CRVSGF1200	12	17.25	125	
	CRVSGF1400	14	17.25	105	

CORRECTION FOR TEMP. ABOVE 70° F	
TEMP° F	FACTOR
70	1.00
200	0.92
300	0.86
400	0.82
500	0.77
600	0.73

\* FOR SAFE WORKING PRESSURE ABOVE 70° F MULTIPLY PRESSURE SHOWN AT 70° F BY CORRECTION FACTOR OF REQUIRED TEMP.

MAX. PERMANENT OFFSET FROM  $\phi$  3/8"  
MAX. INTERMITTENT OFFSET FROM  $\phi$  1/8"

CUSTOMER \_\_\_\_\_

PROJECT \_\_\_\_\_

ENGINEER \_\_\_\_\_

ARCHITECT \_\_\_\_\_

INQ. OR P.O. NO. \_\_\_\_\_

2323 W. HUBBARD ST.  
CHICAGO, IL 60612  
TEL: 312-738-3800  
FAX: 312-738-0415  
WWW.METRAFLEX.COM

CRV FLEX WITH GROOVE END X 150# PLATE FLANGE FOR CONNECTING TO A S.R. ELBOW

DRAWN BY: MG	APPROVED BY: JC	DATE APPROVED: 03/28/05
DATE: 03/25/05	REV: 01	DRAWING NUMBER: CRVSGF