

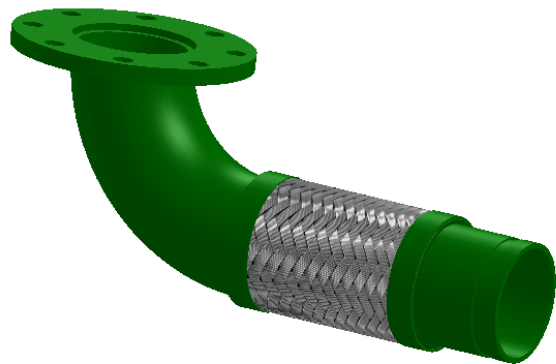


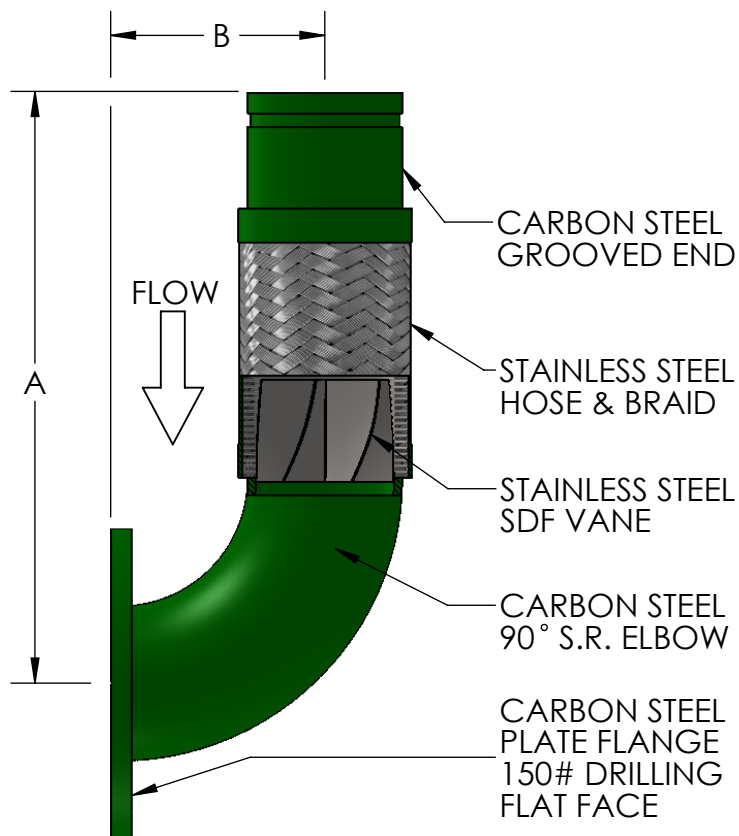

Qty	Part Number	Size (in)	A (in)	B (in)	PSI @ 70°F	Project Info
	SDFL90GF0200	2	14-1/4	3-1/4	455	
	SDFL90GF0250	2-1/2	15	4	345	
	SDFL90GF0300	3	15-3/4	4-3/4	289	
	SDFL90GF0400	4	17-1/4	6-1/4	300	
	SDFL90GF0500	5	20-3/4	7-3/4	220	
	SDFL90GF0600	6	22-1/4	9-1/4	200	
	SDFL90GF0800	8	26-3/4	12-1/4	190	
	SDFL90GF1000	10	30-3/4	15-1/4	150	
	SDFL90GF1200	12	34-3/4	18-1/4	125	
	SDFL90GF1400	14	37-3/4	21-1/4	105	

MAX PERMANENT OFFSET FROM CENTERLINE - 3/8"
MAX INTERMITTENT OFFSET FROM CENTERLINE - 1/8"

*For safe working pressure above 70°F,
multiply pressure shown at 70°F by
correction factor of required temp.

Temperature (°F)	Factor
70	1.00
200	0.92
300	0.86
400	0.82
500	0.77
600	0.73

LEAD FREE

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

CUSTOMER: _____

PROJECT: _____

ENGINEER: _____

REV. 1	VANE STAINLESS	DATE 12/3/2013
Metraflex <i>for pipes in motion</i>		
2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM		
Suction Diffuser Flex with Grooved x 150# Plate Flange and a L.R. Elbow		
DRAWN BY: DKISH	DATE: 11/22/2013	
APPROVED: JC	DATE: 11/22/2013	
SCALE: NONE	DRAWING NUMBER: SDFL90GF	