
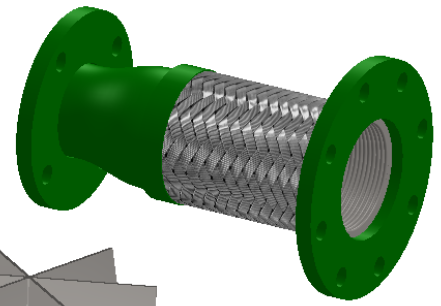


**SHORT RADIUS**  
 DESIGNED TO BE INSTALLED  
 IMMEDIATELY UP-STREAM OF A  
 SHORT RADIUS 90° ELBOW.

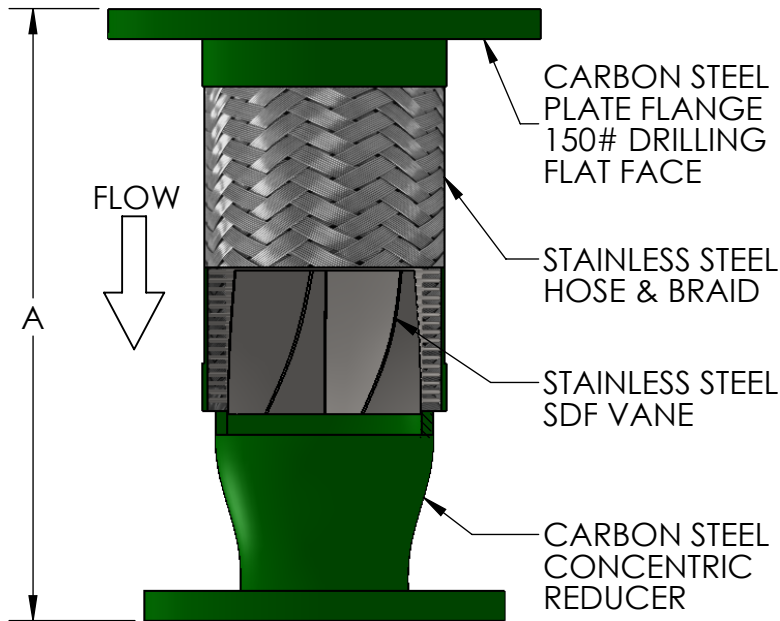

\*For safe working pressure above 70°F,  
 multiply pressure shown at 70°F by  
 correction factor of required temp.

Temperature (°F)	Factor
70	1.00
200	0.92
300	0.86
400	0.82
500	0.77
600	0.73

Qty	Part Number	Size (in)	A (in)	PSI @ 70°F	Project Info
	SDFSR2502	2-1/2 X 2	12-1/4	345	
	SDFSR0302	3 X 2	12-1/4	289	
	SDFSR0325	3 X 2-1/2	12-1/4	289	
	SDFSR0402	4 X 2	12-3/4	300	
	SDFSR0425	4 X 2-1/2	12-3/4	300	
	SDFSR0403	4 X 3	12-3/4	300	
	SDFSR0525	5 X 2-1/2	15-3/4	220	
	SDFSR0503	5 X 3	15-3/4	220	
	SDFSR0504	5 X 4	15-3/4	220	
	SDFSR0603	6 X 3	16-1/4	200	
	SDFSR0604	6 X 4	16-1/4	200	
	SDFSR0605	6 X 5	16-1/4	200	
	SDFSR0804	8 X 4	17-1/2	190	
	SDFSR0805	8 X 5	17-1/2	190	
	SDFSR0806	8 X 6	17-1/2	190	
	SDFSR1006	10 X 6	19-1/2	150	
	SDFSR1008	10 X 8	19-1/2	150	
	SDFSR1210	12 X 10	21-1/2	125	

**LEAD FREE**

The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards, where applicable, requiring reduced lead content.

MAX PERMANENT OFFSET FROM CENTERLINE - 3/8"  
 MAX INTERMITTENT OFFSET FROM CENTERLINE - 1/8"

CUSTOMER: \_\_\_\_\_

PROJECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_

REV. 1	VANE STAINLESS	DATE 12/3/2013
		2323 W. HUBBARD ST. CHICAGO, IL 60612 TEL: 312-738-3800 FAX: 312-738-0415 WWW.METRAFLEX.COM
Suction Diffuser Flex with 150# Plate Flanges and a Reducer for Connecting to a S.R. Elbow		
DRAWN BY: <b>DKISH</b>		DATE: <b>11/22/2013</b>
APPROVED: <b>JC</b>		DATE: <b>11/22/2013</b>
SCALE: <b>NONE</b>	DRAWING NUMBER: <b>SDFSR</b>	